


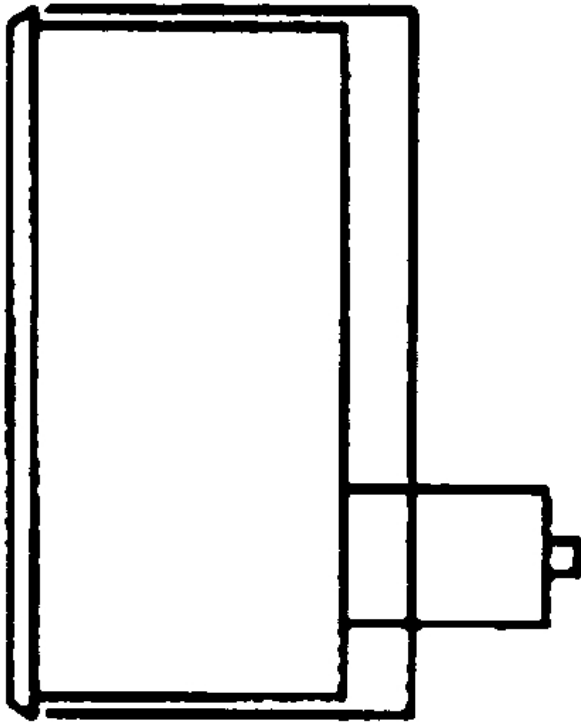

## Bourdon tube pressure gauges for chemical applications RF50ChGly

Part no. 85062752

Bourdon tube pressure gauge for chemical applications type D7 with glycerine filling

### benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- can be used in case of heavy vibrations and high, dynamic pressure loads
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

### Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments. For measurements in areas with high vibration levels and high, dynamic pressure loads.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

#### Type

D7

#### Nominal size

50

#### accuracy class (EN 837-1/6)

1.6

#### ranges (EN 837-1/5)

see ordering table

#### application area

static load:  $\frac{3}{4}$  x full scale value

dynamic load:  $\frac{2}{3}$  x full scale value

short-term: Full scale value

#### Operating temperature range

Medium: max. 100 °C

Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx.  $\pm 0.4$  %/10 K

falling temperature approx.  $\pm 0.4$  %/10 K  
of full scale value

#### Degree of protection

IP 54 (EN 60529) with housing vent (< 25 bar)

### standard version

#### Connection

Stainless steel 316 L, bottom back

#### Measuring element

Bourdon tube, stainless steel 316 Ti/316 L

≤ 60 bar: "C" type tube

> 60 bar: helical tube

tightness-tested with helium

#### movement

Stainless steel

#### Dial

Aluminium, white

Scaling: black

#### Pointer

Aluminium, black

#### Housing

Stainless steel 304, with blow-out

#### bayonet bezel

NG 50

#### crimped bezel

Stainless steel 304

#### window

NG 50

Plastic

#### filling liquid


glycerine (99.5 %)

### Options

- Filling liquid silicone oil
- plastic window (NG 63)
- Back flange (NG 63)
- clamp fixing
- Ex version
- Crimped bezel, polished
- special scales
- other process connections

### Technical Drawings

**NG 50 – bottom back connection, with clamp fixing**

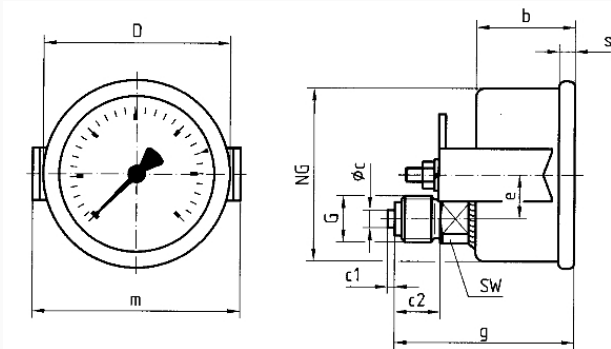

**Dimensions (mm)**

| NG | b  | Øc | c1 | c2 | D  | e    | G       | g  | m  | s   | SW |
|----|----|----|----|----|----|------|---------|----|----|-----|----|
| 50 | 28 | 5  | 2  | 13 | 53 | 12,5 | G 1/4 B | 51 | 59 | 4,5 | 14 |

Versions

| Range     | Mounting type | Type              |                                                                                     | Part number |
|-----------|---------------|-------------------|-------------------------------------------------------------------------------------|-------------|
| 0/2.5 bar | clamp fixing  | RF50ChGly<br>D752 |  | 85062752    |

-  in-stock items
-  Non-stock items