


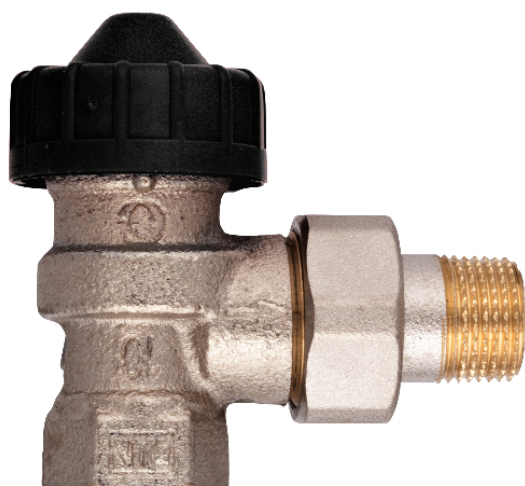

thermostat valve body Vario M E DN20

Part no. 141 230.101

thermostat valve body

benefits

- fully adjustable
- valve insert can be replaced without system having to be drained
- various versions and sizes for virtually any application


Application

Suitable for medium water volumes. For installation in dual-pipe central heating systems.

Description

Low-noise thermostat valve body with threaded connection M 30 x 1.5 mm for thermostat control heads and actuators. Mounting cap with valve shut-off function. Fully adjustable with ES-SV adjustment key. Valve spindle with double O ring seal. The valve insert can be replaced with the MGK mounting unit at operating pressure without the system having to be drained.

Technical Drawings

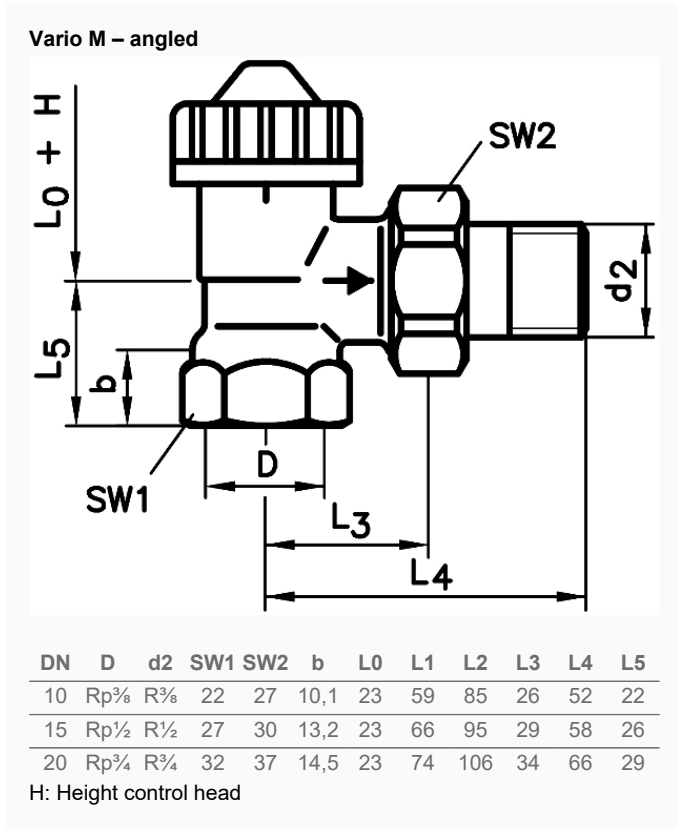

Versions

		Version	Version	Nominal diameter	Connec- tion	Flow co- efficient*	Flow co- efficient Kvs**		Part no.
Vario M	for medi- um water volumes	Angled		DN 20	Rp $\frac{3}{4}$ x R $\frac{3}{4}$	0.038 – 0.4 m ³ /h	0.79 m ³ /h	●	141 230.101

- in-stock items
- Non-stock items