



## Bourdon tube pressure gauge HZ 63 rad

Part no. 63910

Bourdon tube pressure gauge HZ for heating/plumbing

### benefits

- with self-sealing connection thread (NG 50 and 63) for fast mounting
- red maximum mark on dial
- adjustable red reference pointer and green operation segment on window
- corrosion-resistant housing

### Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys and EPDM.  
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

#### Nominal size

63

#### accuracy class (EN 837-1/6)

2.5

#### ranges

0/4 bar

#### application area

static load:  $\frac{3}{4}$  x full scale value  
dynamic load:  $\frac{2}{3}$  x full scale value  
short-term: Full scale value

#### Operating temperature range

Medium: max. 60 °C  
Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx.  $\pm 0.4$  %/10 K  
falling temperature approx.  $\pm 0.4$  %/10 K  
of full scale value

#### Degree of protection

IP 32 (EN 60529)

#### Connection

Brass, bottom  
NG 63  
G $\frac{3}{8}$ B, Self-sealing with PTFE sealing ring

#### Measuring element

Bourdon tube, "C" type tube  
Copper alloy

#### movement

Brass

**Dial**

Plastic, white  
 With red mark at 3 bar and green sector from 1.5 to 3 bar  
 Scaling: black

**Pointer**

Plastic, black

**Housing**


Plastic (ABS), black, highly impact-resistant and corrosion-resistant

**window**

Plastic, clipped in  
 with adjustable red reference pointer and green flag

**Technical Drawings**

**RF/HZ 63 – bottom connection**

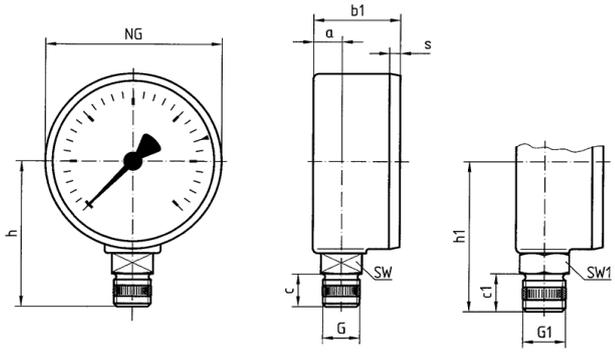

**Dimensions (mm)**

NG	a	b1	c	c1	G	G1	h	h1	s	SW	SW1
63	9,8	29,7	11,2	13	G½B	G¾B	49,5	51,5	3,7	14	17

**Versions**

	housing ø	Connec- tion	Connec- tion	Thread	alignment	Range	Type		Part no.
HZ 63	63 mm	G¾B		Self-sea- ling with PTFE sealing ring	bottom	0/4 bar	HZ 63 rad	●	63910

- in-stock items
- Non-stock items